



## Production planning in additive manufacturing and 3D printing



Qiang Li<sup>a,c</sup>, Ibrahim Kucukkoc<sup>a,b,\*</sup>, David Z. Zhang<sup>a,c</sup>

<sup>a</sup> College of Engineering, Mathematics and Physical Sciences, University of Exeter, North Park Road, Exeter EX4 4QF, England, United Kingdom

<sup>b</sup> Department of Industrial Engineering, Faculty of Engineering, Balikesir University, Cagis Campus, Balikesir 10145, Turkey

<sup>c</sup> The State Key Laboratory of Mechanical Transmissions, Chongqing University, Chongqing 400044, China

### ARTICLE INFO

#### Article history:

Received 3 June 2016

Revised 28 October 2016

Accepted 24 January 2017

Available online 25 January 2017

#### Keywords:

Production planning

Additive manufacturing

3D printing

Scheduling

Operations management

Optimization

### ABSTRACT

Additive manufacturing is a new and emerging technology and has been shown to be the future of manufacturing systems. Because of the high purchasing and processing costs of additive manufacturing machines, the planning and scheduling of parts to be processed on these machines play a vital role in reducing operational costs, providing service to customers with less price and increasing the profitability of companies which provide such services. However, this topic has not yet been studied in the literature, although cost functions have been developed to calculate the average production cost per volume of material for additive manufacturing machines.

In an environment where there are machines with different specifications (i.e. production time and cost per volume of material, processing time per unit height, set-up time, maximum supported area and height, etc.) and parts in different heights, areas and volumes, allocation of parts to machines in different sets or groups to minimize the average production cost per volume of material constitutes an interesting and challenging research problem. This paper defines the problem for the first time in the literature and proposes a mathematical model to formulate it. The mathematical model is coded in CPLEX and two different heuristic procedures, namely 'best-fit' and 'adapted best-fit' rules, are developed in JavaScript. Solution-building mechanisms of the proposed heuristics are explained stepwise through examples. A numerical example is also given, for which an optimum solution and heuristic solutions are provided in detail, for illustration. Test problems are created and a comprehensive experimental study is conducted to test the performance of the heuristics. Experimental tests indicate that both heuristics provide promising results. The necessity of planning additive manufacturing machines in reducing processing costs is also verified.

© 2017 Elsevier Ltd. All rights reserved.

### 1. Introduction

Additive manufacturing (AM), also known as 3D printing (3DP), is the “process of joining materials to make objects from 3D model data, usually layer upon layer, as opposed to subtractive manufacturing methodologies, such as traditional machining” [1]. The development of AM technology started in the 1980s, and different AM processes have been developed, such as fused deposition modeling, laminated object manufacturing, stereo lithography and selective laser sintering, which are usually used as a means for rapid prototyping of non-metal materials. Laser engineered net shaping, electron beam melting and selective laser melting (SLM) – also known as direct metal laser sintering (DMLS) – are the most significant

AM processes for rapid manufacturing, as opposed to prototyping, of metal materials. Detailed information on these AM processes have been given in previous works, see for example Coykendall et al. [2], Huang et al. [3], and Koff and Gustafson [4]. Compared to conventional manufacturing processes, AM processes carry several significant advantages, such as material efficiency, resource efficiency, part flexibility, production flexibility [3,5] and direct kitting [6,7]. These advantages empower AM as a unique competitor in production of small-batch products with complex structures and rapidly-changing designs [5]. A growing number of companies from various industries are trying to adopt AM/3DP technologies in the production of their products. As such, a series of issues in production planning of AM/3DP, particularly with SLM/DMLS facilities, are emerging due to the unique nature of this production process.

With the rapid development of material science and manufacturing technologies, AM (in particular SLM/DMLS) has shifted from making prototypes to direct part production (which is also known as direct digital manufacturing). Such a shift also leads to a new industrial revolution in the defense, aerospace, automotive

\* Corresponding author at: College of Engineering, Mathematics and Physical Sciences, University of Exeter, North Park Road, EX4 4QF Exeter, England, United Kingdom.

E-mail addresses: [Q.Li@exeter.ac.uk](mailto:Q.Li@exeter.ac.uk) (Q. Li), [ikucukkoc@balikesir.edu.tr](mailto:ikucukkoc@balikesir.edu.tr), [I.Kucukkoc@exeter.ac.uk](mailto:I.Kucukkoc@exeter.ac.uk) (I. Kucukkoc), [D.Z.Zhang@exeter.ac.uk](mailto:D.Z.Zhang@exeter.ac.uk) (D.Z. Zhang).

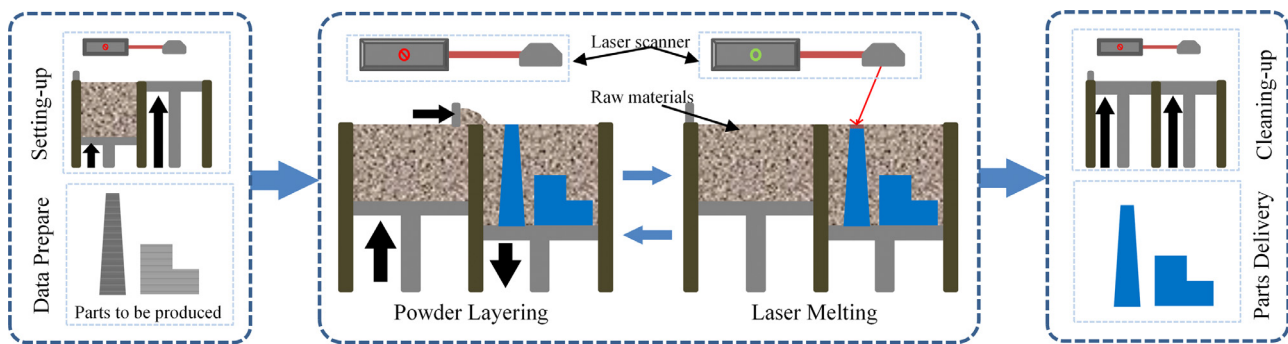


Fig. 1. The production process of SLM/DMLS.

and healthcare industries. As the AM technology is used directly to produce end-use metallic parts from powder materials, SLM/DMLS technology has become the dominant application of metallic AM processes, thanks to its high accuracy and performance in comparison to other metallic AM processes. The benefits of adopting SLM/DMLS have been captured in a variety of applications, spanning a number of industries and different stages of the product development lifecycle. The aerospace and defense industry, as an early adopter of AM technology, currently represents over 10% of the global AM market, and the metal AM sector alone has grown by over 70% in the last 15 years [8]. As reported by Coykendall et al. [2], NASA (National Aeronautics and Space Administration) used 70 additively-manufactured parts (such as flame-retardant vents, camera mounts and housings) for the Mars Rover test vehicles. Also, NASA has already trialed 3D printing on the International Space Station, which allows astronauts to print tools and parts in space exactly when needed [9]. Boeing had printed 22,000 components that are used in a variety of aircrafts by 2012. European Aeronautic Defense and Space (EADS) used DMLS to build an optimized design of bracket, which will be used in the Airbus A320; DMLS brought down the part's weight by 64% while maintaining its strength and performance. General Electric used additively manufactured fuel nozzles as a single part, which previously involved the assembly of 20 different parts, in their LEAP engines. The parts are also reported to be five times more durable than those produced using conventional methods [2]. In the automotive industry, major manufacturers have been using 3DP for prototyping for years, and are poised to begin applying the process to produce parts directly. There is a growing number of applications for 3DP in surgery to produce implants such as cranial plates, jaws, and dentures with titanium, which perfectly match the human body.

The general production process of SLM/DMLS, as well as powder-bed based AM technology, is illustrated in Fig. 1. The production with SLM/DMLS is job-based, and one or more parts with different heights can be produced simultaneously in one job. Firstly, a series of operations is needed to set up a new job, such as data preparation, filling of powder materials, adjustment of the AM machine, and filling up protective atmosphere. Afterwards, the job can be started. Thin powder layers with a typical thickness of between  $20\mu\text{m}$  and  $60\mu\text{m}$  are generated on a metallic base plate or the already-produced fraction of objects. The cross-sections of a sliced computer-aided-design file are subsequently scanned using a high power laser beam to densify the powder material [10]. These two processes, namely powder layering and laser melting, will alternate until all parts in the job are produced. The accumulated time spent on generating powder layers will be significant, especially when the thickness of each layer is smaller, even longer than the time spent densifying the powder materials in some cases. For example, given a part 300 mm high, and 15 s for generating each powder layer, the AM machine will spend more than 62 h gener-

ating powder layers if the thickness of each layer is  $20\mu\text{m}$ . Finally, the parts produced in the job should be taken out from machine for post-processing, and the machine should be cleaned. The filters should also be replaced periodically in preparation for the next job. Time spent on setting up a new job and cleaning the AM machine usually ranges from one hour to several hours.

Currently, the operating costs of SLM/DMLS is high due to its nature of the layer-upon-layer process. That is the major reason which prevents the extensive application of SLM/DMLS in industry. The high operation cost requires distributed parts to be centralized to increase utilization of the AM/3DP equipment. However, it is usually hard for individual companies to undertake the high investment and operating costs of centralization. Furthermore, the production requests of one company are usually far from filling the capacity of an AM/3DP machine, and the machines are mostly used for producing parts during the research and development (R&D) phase of creating new products. Therefore, it is recommended that distributed parts should be centralized to increase the utilization of the AM/3DP machines. Second, the nature of the layer-upon-layer process and job-based production makes it difficult to produce an optimal production schedule of parts. According to the production processes of SLM/DMLS described previously, only the time and costs spent on laser melting are directly related to the material volume of each part in the job. Time and costs spent on setting up a new job, powder layering, and cleaning of the machine are shared by all parts arranged in the same job. As mentioned previously, these shared time and costs are significant, especially when there are parts which are taller or built using thinner layers. For example, given a part 300 mm in height,  $100\text{mm}^2$  in production area and  $6000\text{mm}^3$  in material volume, on a standard AM/3DP machine (whose details will be given in Section 3.2 for a numerical example) the production cost per unit volume of material will be 46.52 British Pound Sterling – GBP (according to the formulation which will be given in Section 3.2). However, this cost will be reduced to 5.16 GBP (about one ninth) if the remaining production area is assigned to other parts with the same specification of the given part. In doing so, the production cost per unit volume of material will change every time a new part is added into the job, and the final production cost cannot be determined until all the parts have been assigned. Furthermore, the production time of a job cannot be determined unless all the parts in a job have been assigned, which makes it difficult to get an optimal result when the delivery time of each part is considered. There are some production scheduling techniques for batch processes, see for example Lin et al. [11], Mishra et al. [12] and Mendez et al. [13]. However, considering the unique and sophisticated production environment of SLM/DMLS, novel production planning models and optimization techniques are required to facilitate their application in industry.

As an emerging advanced manufacturing technology, AM technology has been studied extensively by academics and practition-

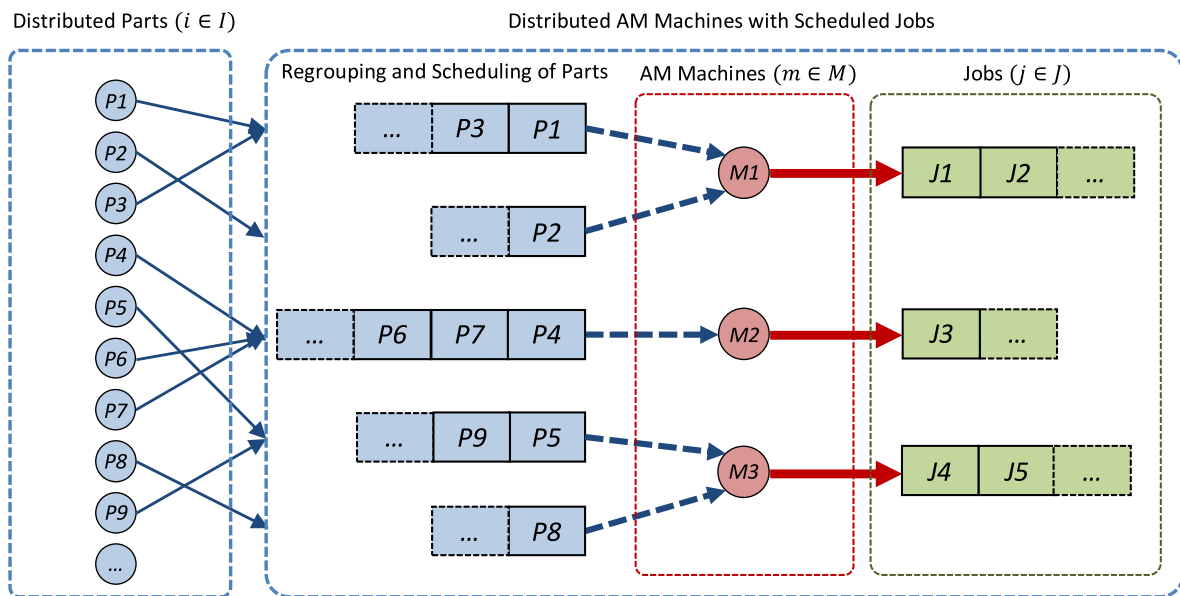


Fig. 2. Concept model for AM production scheduling.

ers. However, researchers are mostly focused on the process and their applications in different industries, see for example, SmarTech [14], Cooper et al. [15], Khajavi et al. [16], and Koff and Gustafson [4]. Few pieces of research have been conducted for the calculation of cost structures in AM technology. Atzeni and Salmi [17] compared the production cost between SLS and traditional high-pressure die-casting and concluded that additive techniques can be economically convenient. Rickenbacher et al. [10] proposed an integrated cost model for SLM and found that the manufacturing time, as well as the set-up time (and therefore the total cost per part), was significantly reduced by simultaneously building up multiple parts. The cost models proposed in the past have also been discussed by Rickenbacher et al. [10]. Those cost models presented different methods for calculating the production cost of AM. Also, Hedenstierna et al. [7] addressed to order book management in 3D printing service operations for capacity smoothing. However, to the best of authors' knowledge, no research has been conducted to address planning of production with AM technologies. In comparison with traditional manufacturing technologies, production with AM technology (in particular powder-bed based SLM/DMLS) is significantly different, where a novel method is needed to facilitate the utilization of AM machines efficiently and reduce production costs. The major distinction of production with a powder-bed based AM process is that the production cost and lead time are dynamically impacted by the combination of parts included in the same job, while some parts cannot be allocated to some machines due to capacity and maximum supported height/area characteristics. Therefore, it is hard to determine which combination of parts will be produced on which machine. The cost and time of a job may vary when a part with a particular height, production area, and material volume is added. In this environment, this paper aims to introduce and define the problem of production planning of AM machines, which is the novel and major contribution of the work. A mathematical model of the problem will also be developed to formalize the problem and get optimal solutions and two heuristic algorithms will be proposed for getting good quality solutions to the problem in reasonable computational times.

The rest of this paper is organized as follows. The problem of production planning of AM machines is defined and modeled mathematically in Section 2. Proposed heuristic procedures are explained systematically and illustrated through examples in Section 3. Optimal and heuristic solutions for a numerical example are pre-

sented in Section 4. A computational study is designed and conducted in Section 5, followed by conclusions and future research directions in Section 6.

## 2. Problem statement

As described in Section 1, this paper studies production planning of distributed AM machines to fulfill demands received from individual customers in low quantities. The production with powder-bed based AM machines is operated on a job by job basis. The capacity of a given AM machine depends on its total available production area and allowed maximum part height. Each AM machine will be assigned a relatively fixed labor cost and time cost, and a particular process parameter will be set with a specified building speed and layer thickness. The distributed fabrication orders will be dispersed on a part by part basis using specific height, production area, and material volume. The problem is how to regroup the given parts from distributed customers and allocate them to distributed AM machines with various cost and speed characteristics by minimizing average production cost per unit volume of material. The concept model is depicted in Fig. 2.

As seen from Fig. 2, the problem consists of a set of AM machines ( $m=1, \dots, m_n$ ), where each AM machine has different specifications, including operation cost, production efficiency and maximum supported area and height. There exists a set of parts ( $i=1, \dots, i_n$ ) with different volumes, heights and production areas as determined by the customer's demands. The parts will be allocated to AM machines and then grouped as different sets of jobs ( $j=1, \dots, j_n$ ) by considering the production cost per unit volume. The jobs then will be performed in the AM machines according to the production schedule of each AM machine.

Different sets or combinations of parts in a job will lead to different costs, as the total cost of performing a particular job is characterized by the total volume and maximum height of parts assigned to the job, while the total cost of the job is shared by all parts included in the same job. Also, due to the various characteristics of the AM machines, some parts cannot be produced on some machines. For example, a part which is higher than the maximum height supported by a particular machine cannot be allocated to any job on this machine. Similarly, a part which is larger than the maximum area supported by a particular machine cannot be allocated to this machine.

### 2.1. Assumptions

The production area of parts considered in this study is not the real production area. To obtain production area of a part, some tolerance was added to its real area, which provides us flexibility in allocating parts on to the platform of the AM machine without having to consider a sophisticated nesting problem. Each part has a predefined orientation according to the quality and the requirements of the additive manufacturing process. Therefore, parts can only be moved on the platform horizontally while it is not allowed to rotate the parts vertically. As this study is the first of its kind, only one type of material is considered in this study to keep the complexity of the model at a minimum and focus on the main idea underlying the research. Additionally, no due dates are taken into account for fulfilling orders for the same reason.

### 2.2. Mathematical model

#### 2.2.1. Notation

The following notations are used in the formulation of the mathematical model of the problem:

$i$	part index ( $i=1, \dots, i_n$ and $i \in I$ )
$j$	job index ( $j=1, \dots, j_n$ and $j_n=i_n$ )
$m$	machine index ( $m=1, \dots, m_n$ and $m \in M$ )
$h_i$	height of part $i$
$a_i$	production area of part $i$
$v_i$	material volume of part $i$
$MC$	cost per unit volume of material
$TC_m$	operation cost per unit time for machine $m$
$VT_m$	time for forming per unit volume of material for machine $m$
$HT_m$	accumulated interval time per unit height for machine $m$
$HC$	cost of human work per time unit (will be used to calculate set-up cost)
$ST_m$	set-up time needed for machine $m$
$H_m$	maximum height of part that machine $m$ can process
$A_m$	maximum production area of part that machine $m$ can process
$JPC_{mj}$	production cost of job $j$ on machine $m$

#### 2.2.2. Decision variables

$$X_{ji} = \begin{cases} 1 & \text{if part } i \text{ is processed in job } j \\ 0 & \text{otherwise} \end{cases}$$

$$Y_{mj} = \begin{cases} 1 & \text{if job } j \text{ is processed on machine } m \\ 0 & \text{otherwise} \end{cases}$$

#### 2.2.3. Objective function

In terms of the notation given above, the production cost of job  $j$  on machine  $m$ , represented by  $JPC_{mj}$ , can be formulated as follows:

$$JPC_{mj} = (TC_m \cdot VT_m + MC) \cdot \sum_{i \in I_{mj}} v_i + TC_m \cdot HT_m \cdot \max_{i \in I_{mj}} \{h_i\} + ST_m \cdot HC, \tag{1}$$

where  $I_{mj}$  is the set of parts assigned to job  $j$  ( $j \in J$ ) on machine  $m$  ( $m \in M$ ).

The production cost of an AM job is comprised of three sections: cost of material melting depending on the material volume of parts; cost of powder layering depending on the maximum height of parts in the same job; and cost of setting up a new job. The cost of setting up a new job and powder layering are shared by all parts within the same job. There is no cost for changing the material as it is assumed that only one type of material is used for all machines.

The ultimate goal of the proposed model in this study is to minimize the average production cost per volume of material for the whole system (including all jobs on all machines). Therefore, the objective function is formulated as follows:

$$\min Z = \frac{\sum_{m=1}^{m_n} \sum_{j=1}^{j_n} JPC_{mj}}{\sum_{i \in I} v_i} \tag{2}$$

#### 2.2.4. Constraints

**2.2.4.1. Part occurrence/assignment constraint.** Parts cannot be split into more than one job. Therefore, each part must be allocated to one job exactly.

$$\sum_{j=1}^{j_n} X_{ji} = 1; \quad \forall i \in I. \tag{3}$$

**2.2.4.2. Job occurrence constraint.** Each planned job can be assigned to one machine only when there is at least one part assigned in this job. In other words, if any part is assigned to job  $j$ ,  $j$  must be assigned to exactly one machine.

$$\sum_{m=1}^{m_n} Y_{mj} - Z_j = 0; \quad \forall j \in J. \tag{4}$$

where  $Z_j$  is an indicator variable,  $Z_j = \begin{cases} 1 & \text{if } \sum_{i \in I} X_{ji} \geq 1 \\ 0 & \text{otherwise} \end{cases}$ .

**2.2.4.3. Capacity constraint.** The total area needed to produce parts assigned to each job on each machine must be smaller than the available area of that machine.

$$\sum_{i \in I} a_i \cdot X_{ji} \cdot Y_{mj} \leq A_m; \quad \forall m \in M; \quad \forall j \in J. \tag{5}$$

The maximum height of parts assigned to a job on a specific machine cannot exceed the maximum height supported by this particular machine.

$$\max_{i \in I} \{h_i \cdot X_{ji} \cdot Y_{mj}\} \leq H_m; \quad \forall m \in M; \quad \forall j \in J. \tag{6}$$

**2.2.4.4. Job utilization constraint.** Jobs will be utilized incrementally, starting from the first job ( $j=1, 2$ , and so on). In other words, a new job can be utilized by a machine if all of its previous jobs have been utilized.

$$\max_{i \in I_j} \{X_{ji}\} \geq \max_{i \in I_{j+1}} \{X_{(j+1)i}\}; \quad \forall j \in J. \tag{7}$$

where  $I_j$  is the set of parts assigned to job  $j$ .

## 3. Heuristic procedures (BF and ABF)

The mathematical model is presented in the previous section for the production planning problem of AM machines. However, pre-emptive experiments have shown that it is not possible to get optimal solutions in reasonable CPU times when the problem size increases. For that reason, we also propose two heuristic rules, namely best-fit (BF) and adapted best-fit (ABF), for solving the problem efficiently. This section explains the solution-building mechanism of both algorithms step-by-step.

### 3.1. Heuristic regrouping and scheduling procedure

Both heuristic procedures, namely BF and ABF, use the same regrouping and scheduling procedure given in Fig. 3. The difference between BF and ABF is the decision rule that is applied to select parts from the list of available parts. This rule determines which

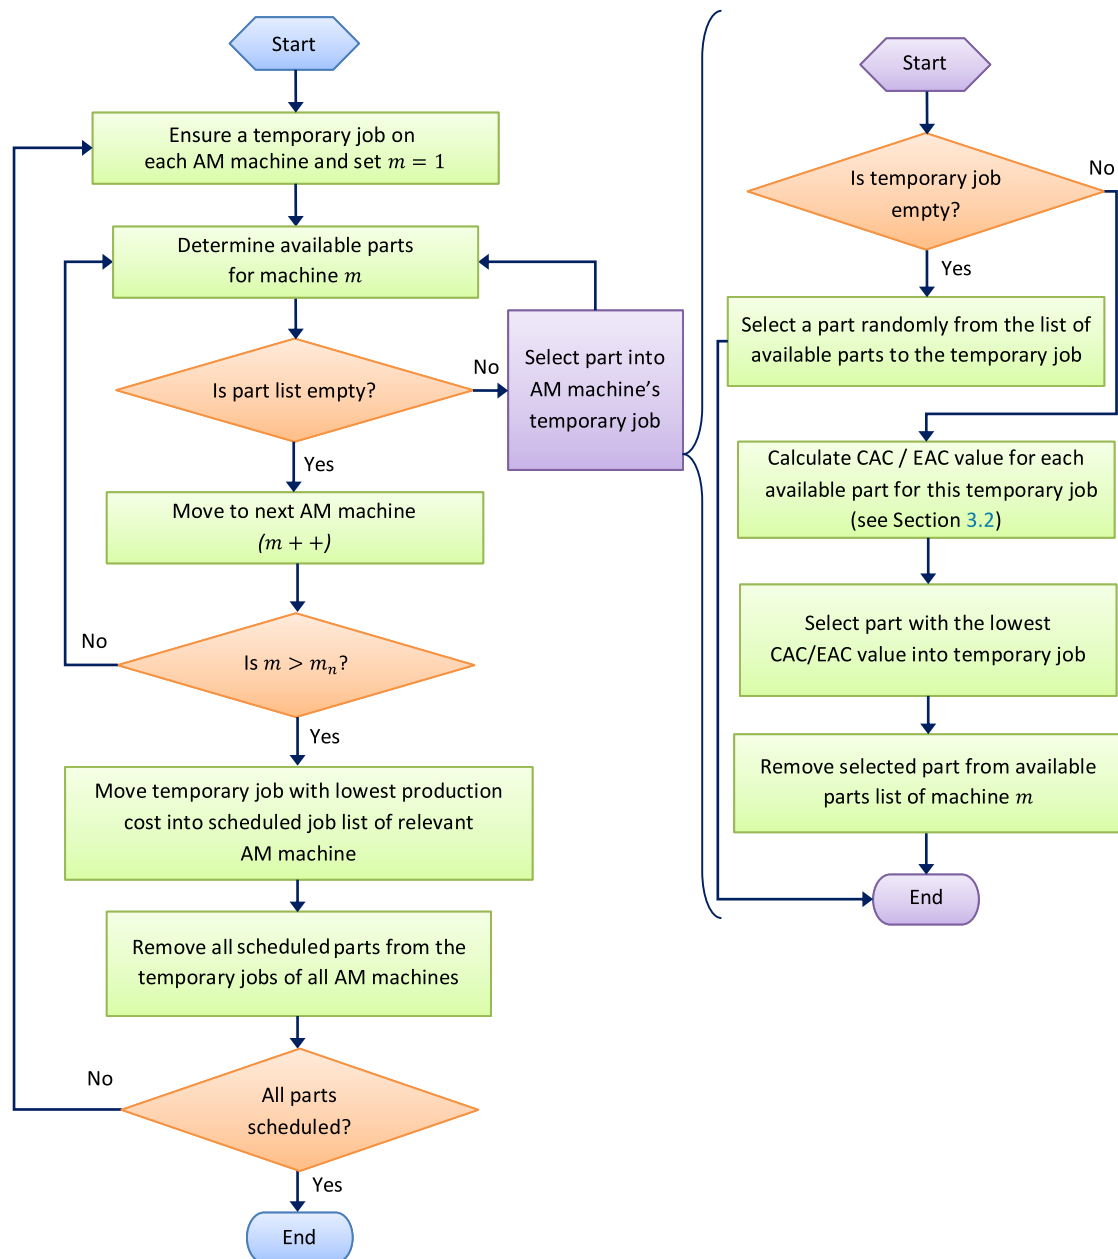


Fig. 3. Proposed regrouping and scheduling procedure.

part to select based on the calculated cost structures that will be explained in Section 3.2.

To clearly explain this procedure, it is important to define the terms *job*, *temporary job*, *assigned part* and *scheduled part*. Each AM machine keeps a temporary job to regroup given parts and allocate them to jobs. A temporary job is called a job if it is scheduled on an AM machine. An assigned part is a part which has been assigned to a temporary job. On the other hand, a scheduled part means a part which is assigned to a job which is eventually scheduled on a machine. This means that part cannot be assigned to any other job or temporary job.

As seen in Fig. 3, the procedure starts with creating a new empty temporary job on each AM machine. Available parts are determined for the first machine considering its specifications, i.e. the remaining area on the platform and the maximum height supported. Available parts for a machine are determined from those which have neither been scheduled previously nor assigned to *this*

*machine's* temporary job. Among the available ones, parts are selected one-by-one and allocated to the temporary job. If this is the first part (i.e. the temporary job is empty), it is selected randomly to get diversified solutions. This is why the selection of the first part affects the selection of the remaining ones due to the cost models (which will be given in the following subsections) and helps the algorithm scan the search space more effectively. Otherwise, as the algorithm employs a constructive single-pass mechanism, the same solution would be produced every time it was run. The list of available parts is updated every time a new part is selected to a temporary job. Thus, the part assigned to the temporary job on this machine is removed from its available parts list. The subsequent parts (i.e. the second, the third and so on) are selected based on their CAC/EAC values (of which the calculations will be explained in Section 3.2) and this cycle continues until there is no part available for this temporary job on the first machine. The algorithm moves to the next machine ( $m++$ ) and the available

parts are determined for this machine. To remind, the parts which have been assigned to the temporary job on the previous machine can be available for this machine since those parts have not been scheduled yet. At this stage, a part can be assigned to more than one temporary job on different machines (not the same machine). The first part and the subsequent ones are selected to this machine (until there is no available part) as in the first machine and a temporary job is obtained for this machine as well.

The algorithm moves to the next machine ( $m++$ ) and eventually, a temporary job is constructed on all AM machines in this way. The production cost of each temporary job is calculated using Eq. (1) given in Section 2.2.3 and the one which has the lowest production cost is converted to a scheduled job on the corresponding AM machine (e.g. if the temporary job of machine 2 has the lowest, it is scheduled on machine 2). The parts existing in a scheduled job cannot be available for any other temporary job any more as they have already been scheduled permanently. Thus, it is ensured that each part is assigned to exactly one machine. New temporary jobs are created on all AM machines. Starting from the first machine, available parts are determined and assigned to temporary jobs following the same procedure used in the previous cycle until the remaining capacity is not enough to accommodate any more parts. The temporary job which has the lowest production cost is scheduled and this cycle continues until there is no part unscheduled. The objective function value of the solution is calculated using Eq. (2) given in Section 2.2.3. The algorithm is run repeatedly until the maximum number of iterations is exceeded and the best solution which gives the minimum objective function value is taken.

### 3.2. Calculation of cost structures

In order to get solutions with two heuristic algorithms proposed, two different cost structures are adopted to decide which part to assign to temporary jobs on the machines. For the BF heuristic algorithm, when part  $i$  ( $i \in I$ ) is subject to selection, the value of the current average cost per unit volume of material ( $CAC_{m(cj)}$ ) for a temporary job on machine  $m$  ( $m \in M$ ) is calculated as follows:

$$CAC_{m(cj)} = \frac{(TC_m \cdot VT_m + MC) \cdot \sum_{i \in I_{m(cj)}} v_i + TC_m \cdot HT_m \cdot \max_{i \in I_{m(cj)}} \{h_i\} + ST_m \cdot HC}{\sum_{i \in I_{m(cj)}} v_i} \quad (8)$$

where  $I_{m(cj)}$  is the collection of parts which have been assigned to the temporary job of machine  $m$  so far (including candidate part  $i$ ). This value will be equal to  $v_i$  when there is no part assigned to the same job before part  $i$ .  $CAC_{m(cj)}$  is calculated for all available parts and the part which has the lowest  $CAC_{m(cj)}$  is assigned to the temporary job of AM machine  $m$  ( $m \in M$ ).

In this approach, the part with the shortest height and the largest volume will most likely be assigned to a temporary job. This policy can result in missing some better combinations of parts, which may lead to less efficient production costs. Therefore, another selection rule, named ABF, is proposed to consider the expected average cost of the temporary job.

According to the ABF approach, the expected average cost of temporary job ( $EAC_{m(cj)}$ ) when assigning part  $i$  ( $i \in I$ ) to machine  $m$  ( $m \in M$ ) is calculated using Eqs. (9) and (10). In this technique, the average production cost of the temporary job is calculated assuming that the parts that will be assigned to the same job later on will have the same volume of material per production area value as part  $i$ . Also, it is assumed that the height of the parts that will be assigned to the job later on are not bigger than the maximum height of parts that have already been assigned to this

**Table 1**

The specifications of AM machines used in the example problem.

Parameters	M1	M2
$TC_m$ , the cost of operation per unit time (GBP/h)	60	80
$VT_m$ , the time consumption to form per unit volume (h/cm <sup>3</sup> )	0.030864	0.030864
$MC$ , the cost of materials per unit volume (GBP/cm <sup>3</sup> )	2	2
$HT_m$ , the accumulated time per unit height (h/cm)	1.4	0.7
$ST_m$ , the time consumption for setting up a new job (h)	2	1
$HC$ , the cost of setting up a new job (GBP/h)	20	20
$H_m$ , the maximum height supported (cm)	32.5	40
$A_m$ , the maximum production area supported (cm <sup>2</sup> )	625	1600

**Table 2**

The specifications of parts used in the example problem.

Part ( $i$ )	Height ( $h_i$ ) in cm	Volume ( $v_i$ ) in cm <sup>3</sup>	Production area ( $a_i$ ) cm <sup>2</sup>
P1	25.10	2867.59	569.53
P2	37.25	2378.05	464.89
P3	39.24	16420.91	779.96
P4	4.27	102.83	122.62
P5	13.56	3640.48	390.39
P6	2.18	214.79	178.34

job.

$$EAC_{m(cj)} = \frac{(TC_m \cdot VT_m + MC) \cdot EV_{m(cj)} + TC_m \cdot HT_m \cdot \max_{i \in I_m} \{h_i\} + ST_m \cdot HC}{EV_{m(cj)}}; \quad (9)$$

$$EV_{m(cj)} = \frac{A_m \cdot \sum_{i \in I_{m(cj)}} v_i}{\sum_{i \in I_{m(cj)}} a_i}; \quad (10)$$

where  $I_{m(cj)}$  is the collection of parts which have been selected for the temporary job of machine  $m$ .

To demonstrate the procedures of the two heuristic algorithms, a small example problem consisting of 2 AM machines and six parts is given in this section. The specifications and parameters of AM machines and parts used in this example are listed in Tables 1 and 2, respectively.

Tables 3 and 4 show the part selection procedure steps for BF and ABF procedures, respectively. As mentioned previously, both heuristics use the same procedure to build an assignment solution. The only difference between the two approaches is the part selection rule, which is characterized by the average cost calculation principle.  $CAC_{m(cj)}$  and  $EAC_{m(cj)}$  values of temporary jobs are calculated using Eqs. (8)–(10) introduced in Section 3.2.

In the first step, randomly selected parts are assigned to the temporary jobs of the machines. In our example, the assigned parts are P1 and P3 for M1 and M2 (respectively) for the BF heuristic (see Step 1 in Table 3), while P5 is selected on both machines for the ABF rule (see Step 1 in Table 4). In Step 2, the availability of each part for each machine is updated based on its production area, height, and the machine's available production area and supported height. Also, the CAC (or EAC) values of the temporary jobs are calculated for all available parts to see what the average production cost will be if a particular part is assigned to this job. The parts which give the minimum CAC (or EAC) value are assigned to the temporary jobs of M1 and M2.

**Table 3**  
Part selection procedure based on CAC values (BF rule).

Step	Machine	The CAC value of available parts for temporary job						Min. CAC (GBP/cm <sup>3</sup> )	Part(s) in the temporary job	Scheduled job(s)
		P1	P2	P3	P4	P5	P6			
1	M1	4.601	N/A	N/A	7.729	4.176	4.891	4.601	P1	N/A
	M2	5.355	4.754	4.604	6.989	4.683	5.131	4.604	P3	N/A
2	M1	N/A	N/A	N/A	N/A	N/A	N/A	4.601	P1	N/A
	M2	4.584	4.587	N/A	4.603	<b>4.58</b>	4.602	4.58	P3,P5	N/A
3	M1	N/A	N/A	N/A	N/A	N/A	N/A	4.601	P1	N/A
	M2	N/A	N/A	N/A	4.579	N/A	<b>4.578</b>	4.578	P3,P5,P6	N/A
4	M1	N/A	N/A	N/A	N/A	N/A	N/A	4.036	P1	N/A
	M2	N/A	N/A	N/A	<b>4.578</b>	N/A	N/A	4.578	P3,P5,P6,P4	N/A
5	M1	N/A	N/A	N/A	N/A	N/A	N/A	<b>4.036</b>	<b>P1</b>	[P1]
	M2	N/A	N/A	N/A	N/A	N/A	N/A	4.578	P3,P5,P6,P4	N/A
6	M1	SC	N/A	N/A	7.729	<b>4.176</b>	4.891	4.176	P5	[P1]
	M2	SC	N/A	N/A	N/A	N/A	N/A	4.578	P3,P5,P6,P4	N/A
7	M1	SC	N/A	N/A	4.167	N/A	<b>4.158</b>	4.158	P5,P6	[P1]
	M2	SC	N/A	N/A	N/A	N/A	N/A	4.578	P3,P5,P6,P4	N/A
8	M1	SC	N/A	N/A	N/A	N/A	N/A	<b>4.158</b>	<b>P5,P6</b>	[P1],[P5,P6]
	M2	SC	N/A	N/A	N/A	N/A	N/A	4.578	P3,P5,P6,P4	N/A
9	M1	SC	N/A	N/A	<b>7.729</b>	SC	SC	7.729	P4	[P1],[P5,P6]
	M2	SC	<b>4.586</b>	N/A	N/A	SC	SC	4.586	P3,P4,P2	N/A
10	M1	SC	N/A	N/A	N/A	SC	SC	7.729	P4	[P1],[P5,P6]
	M2	SC	N/A	N/A	N/A	SC	SC	<b>4.586</b>	<b>P3,P4,P2</b>	[P3,P4,P2]
11	M1	SC	SC	SC	SC	SC	SC	N/A	N/A	[P1],[P5,P6]
	M2	SC	SC	SC	SC	SC	SC	N/A	N/A	[P3,P4,P2]

Average production cost: 4.5236 (GBP/cm<sup>3</sup>)

\* Please note that SC denotes that the job has already been scheduled.

**Table 4**  
Part selection procedure based on EAC values (ABF rule).

Step	Machine	The EAC value of available parts for temporary job						Min. EAC (GBP/cm <sup>3</sup> )	Part(s) in the temporary job	Scheduled job(s)
		P1	P2	P3	P4	P5	P6			
1	M1	4.535	N/A	N/A	4.612	4.054	4.148	4.054	P5	N/A
	M2	4.646	4.726	4.535	4.662	4.521	4.543	4.521	P5	N/A
2	M1	N/A	N/A	N/A	<b>4.11</b>	N/A	4.13	4.11	P5,P4	N/A
	M2	4.601	4.656	4.55	<b>4.536</b>	N/A	4.541	4.536	P5,P4	N/A
3	M1	N/A	N/A	N/A	N/A	N/A	N/A	4.11	P5,P4	N/A
	M2	4.615	4.679	4.558	N/A	N/A	<b>4.554</b>	4.554	P5,P4,P6	N/A
4	M1	N/A	N/A	N/A	N/A	N/A	N/A	4.11	P5,P4	N/A
	M2	4.634	4.709	<b>4.569</b>	N/A	N/A	N/A	4.569	P5,P4,P6,P3	N/A
5	M1	N/A	N/A	N/A	N/A	N/A	N/A	<b>4.11</b>	<b>P5,P4</b>	[P5,P4]
	M2	N/A	N/A	N/A	N/A	N/A	N/A	4.569	P5,P4,P6,P3	N/A
6	M1	4.535	N/A	N/A	SC	SC	<b>4.148</b>	4.148	P6	[P5,P4]
	M2	4.578	<b>4.573</b>	N/A	SC	SC	N/A	4.573	P6,P3,P2	N/A
7	M1	N/A	N/A	N/A	SC	SC	N/A	<b>4.148</b>	<b>P6</b>	[P5,P4],[P6]
	M2	N/A	N/A	N/A	SC	SC	N/A	4.573	P6,P3,P2	N/A
8	M1	<b>4.535</b>	N/A	N/A	SC	SC	SC	4.535	P1	[P5,P4],[P6]
	M2	N/A	N/A	N/A	SC	SC	SC	4.584	P3,P2	N/A
9	M1	N/A	N/A	N/A	SC	SC	SC	<b>4.535</b>	<b>P1</b>	[P5,P4],[P6],[P1]
	M2	N/A	N/A	N/A	SC	SC	SC	4.584	P3,P2	N/A
10	M1	SC	N/A	N/A	SC	SC	SC	N/A	N/A	[P5,P4],[P6],[P1]
	M2	SC	N/A	N/A	SC	SC	SC	<b>4.584</b>	<b>P3,P2</b>	[P3,P2]
11	M1	SC	SC	SC	SC	SC	SC	N/A	N/A	[P5,P4],[P6],[P1]
	M2	SC	SC	SC	SC	SC	SC	N/A	N/A	[P3,P2]

Average production cost: 4.5298 GBP/cm<sup>3</sup>

For the BF heuristic, P5 is assigned to the temporary job of M2, while there is no available part for M1. For the ABF rule, P4 is assigned to the temporary jobs of both M1 and M2, simultaneously. This cycle repeats until there are no available parts for any of the machines (i.e. see Step 5 for both BF and ABF procedures). Afterwards, the CAC (or EAC) values of the temporary jobs on M1 and M2 are compared. The job which has the minimum CAC (or EAC) value is assigned to the relevant machine's scheduled job list (which is now considered a permanent job). In our case, the temporary job on M1 is assigned to the scheduled jobs list for both BF and ABF heuristic procedures. The scheduled job in BF has only one part, i.e. P1, while it contains P5 and P4 in ABF. Therefore, in the ABF heuristic, P5 and P4 are removed from the temporary job of M2 (see Steps 5 and 6 in Table 4). For the BF

heuristic, there is no need to remove P1 from any list at this stage, as P1 is not in the temporary job list of M2 (see Step 5 in Table 3). By this way, the scheduled parts are removed from all temporary jobs on all machines and marked as assigned. The available parts are determined again and the ones which provide the minimum average production costs are assigned to temporary jobs. This cycle continues until all parts are scheduled on exactly one AM machine. For the BF rule, the final solution is that jobs [P1] and [P5, P6] are scheduled on M1, and job [P3, P4 and P2] is scheduled on M2, which provides an average production cost of 4.5236 GBP/cm<sup>3</sup>. For ABF, the final scheduled jobs are [P5, P4], [P6] and [P1] on M1 and [P3, P2] on M2, with an average production cost of 4.5298 GBP/cm<sup>3</sup>.

**Table 5**  
The specifications and parameters of the AM machines.

Parameters	M1	M2
$TC_m$ , the cost of operation per unit time (GBP/h)	60	80
$VT_m$ , the time consumption to form per unit volume ( $\text{h}/\text{cm}^3$ )	0.030864	0.030864
$MC$ , the cost of materials per unit volume (GBP/ $\text{cm}^3$ )	2	2
$HT_m$ , the accumulated time per unit height ( $\text{h}/\text{cm}$ )	0.7	0.7
$ST_m$ , the time consumption for setting up a new job (h)	2	1
$HC$ , the cost of setting up a new job (GBP/h)	20	20
$H_m$ , the maximum height supported (cm)	32.5	40
$A_m$ , the maximum production area supported ( $\text{cm}^2$ )	625	1600

**Table 6**  
Sample data related to the parts.

Part (i)	Height ( $h_i$ ) in cm	Volume ( $v_i$ ) in $\text{cm}^3$	Production area ( $a_i$ ) in $\text{cm}^2$
P1	29.72	12504.71	924.34
P2	9.94	2023.74	315.12
P3	17.13	315.00	48.27
P4	2.67	121.82	84.97
P5	16.02	3527.93	1302.15
P6	11.77	3907.79	1126.33
P7	33.23	4235.62	248.68
P8	32.64	3843.08	243.62
P9	12.53	1786.36	269.66
P10	18.09	1885.00	175.77

## 4. Numerical example

### 4.1. Problem data

A numerical example is given in this section to describe the AM machines' planning problem and to demonstrate the optimal solution of an example problem, along with the heuristic solutions proposed for comparison purposes. The optimal solution of the problem is obtained through developing the mathematical model presented in Section 2.2 on IBM CPLEX Optimization Studio 12.6.1.

A small example problem consisting of 2 AM machines (M1 and M2) with different specifications and 10 parts (P1–P10), with random heights, volumes and production areas, was created. The parameters related to the AM machines are determined based on the authors' experiences in operations of SLM equipment. The related specifications and parameters of AM machines are listed in Table 5. The height, volume, and production area of each part are generated randomly within the range allowed by the AM machines and presented in Table 6.

To obtain feasible solutions, the height and production area characteristics of the parts provided in Table 6 must be considered carefully while assigning parts to the machines. For example, P7 is higher than the maximum height capacity of M1 given in Table 5 ( $33.23 \text{ cm} > 32.5 \text{ cm}$ ). For that reason, this part can only be assigned to M2 to get a feasible solution. In addition, the production areas of parts P1, P5 and P6 are larger than the maximum production area supported by M1. Therefore, these parts can only be produced on M2.

### 4.2. Optimum solution

The mathematical model of the AM machines' planning problem presented in Section 2.2 was coded in IBM CPLEX Optimiza-

**Table 7**  
The optimum allocation of ten parts.

Machine	Job	Scheduled parts	Max height (cm)	Total production area ( $\text{cm}^2$ )
M1	J4	P2, P4	9.94	400.09
M1	J5	P3, P9, P10	18.09	493.70
M2	J1	P1, P7, P8	33.23	1416.64
M2	J2	P5	16.02	1302.15
M2	J3	P6	11.77	1126.33

tion Studio v12.6.1, to be solved using Constraint Programming Optimizer on a workstation with an Intel Xeon CPU E5-2643 3.30 GHz (2 processors) with 128GB RAM. The problem data provided above was given to the software as input, and the optimum solution was found with the objective value of 4.49693 GBP/ $\text{cm}^3$  in 187 CPU seconds. The allocation of parts to the machines is presented in Table 7. Please note that the upper limit for the total number of jobs ( $j_n$ ) was calculated as  $j_n = \lceil i_n \cdot 2/3 \rceil = 7$ , rather than  $i_n = j_n$ , where  $i_n$  is the total number of parts and  $\lceil X \rceil$  denotes the smallest integer which is equal to or greater than X. This action was taken to narrow the solution space and get the optimum solution in a shorter time.

As can be seen from Table 7, a total of five jobs were utilized to produce ten parts. For example, Job 4 was scheduled to produce parts P2 and P4 on M1, where the maximum height of the parts is 9.94 cm, and the total production area requirement for this job is 400.09  $\text{cm}^2$ . As it can be seen, the maximum height and total production area of the parts do not exceed the supported specifics of M1 ( $9.94 \text{ cm} \leq H_1$  and  $400.09 \text{ cm}^2 \leq A_1$ ). Similarly, P1, P7 and P8 were assigned to J1, which is scheduled to be performed on M2. The maximum height of the parts assigned to this job is 33.23 cm, while the total production area of the parts is 1416.64  $\text{cm}^2$ , both of which are supported by M2. Fig. 4 shows the maximum heights and total areas of the utilized jobs in comparison to the specifics of the machines.

### 4.3. Heuristic solutions

To give an insight into the performance of the proposed heuristics, namely BF and ABF, we solved the same numerical example problem using both of the heuristic procedures. BF and ABF were run for 25 iterations on the same workstation with CPLEX, for which the specifications were given in the previous subsection, and the best solutions are reported in Table 8.

The objective function values of the solutions (which are calculated using Eqs. (1) and (2)) are also presented in Table 8, along with the CPU time consumed. Convergence of the BF and ABF procedures throughout 25 iterations is also depicted in Figs. 5 and 6, respectively. When the solutions obtained by BF and ABF are compared to the solution obtained by CPLEX, it is clear that the solution found by ABF is optimal even the allocations of parts are different.

## 5. Computational study

This section provides comprehensive experimental test results obtained through (i) the proposed mathematical model coded in IBM CPLEX Optimization Studio v12.6.1; and (ii) the proposed BF and ABF heuristics coded in JavaScript. Constraint Programming Optimizer was used in CPLEX to get solutions on a workstation with the specifications of Intel Xeon CPU E5-2643 3.30 GHz (2 processors) with 128GB RAM. The BF and ABF heuristics were also run on the same workstation for the accuracy of the comparisons that will be made.



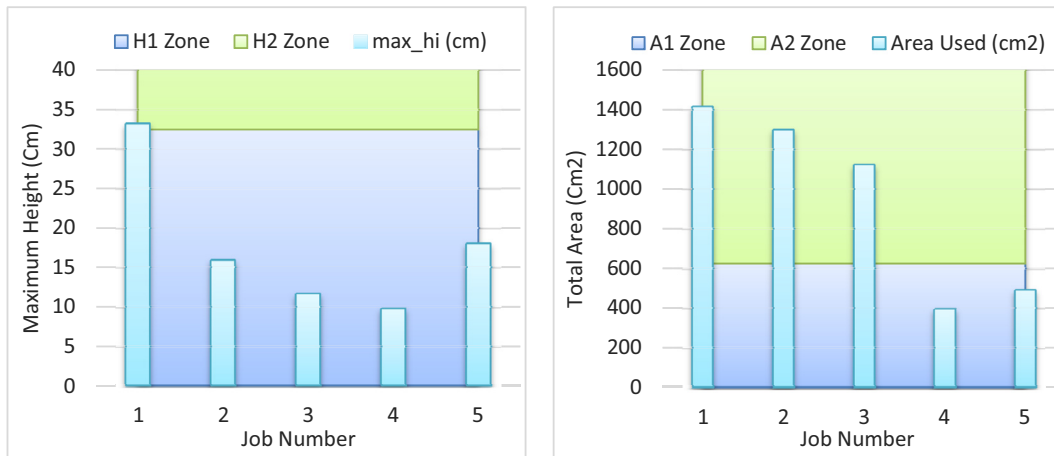


Fig. 4. Maximum heights and total areas of the utilized jobs, J1–J3 on M2 and J4 and J5 on M1.

Table 8  
The best solutions obtained by BF and ABF procedures.

	Machine	Job	Scheduled parts	Max height (cm)	Total area needed (cm <sup>2</sup> )	Objective function value (GBP/cm <sup>3</sup> )	CPU time (s)
BF	M1	J1	P2, P9	12.53	584.78	4.50012	9.957
	M1	J2	P4, P10, P3	18.09	309.01		
	M2	J3	P1, P7, P8	33.23	1416.64		
	M2	J4	P5	16.02	1302.15		
	M2	J5	P6	11.77	1126.33		
ABF	M1	J1	P3, P10, P9, P4	18.09	578.67	4.49693	10.979
	M1	J2	P2	9.94	315.12		
	M2	J3	P7, P8, P1	33.23	1416.64		
	M2	J4	P5	16.02	1302.15		
	M2	J5	P6	11.77	1126.33		

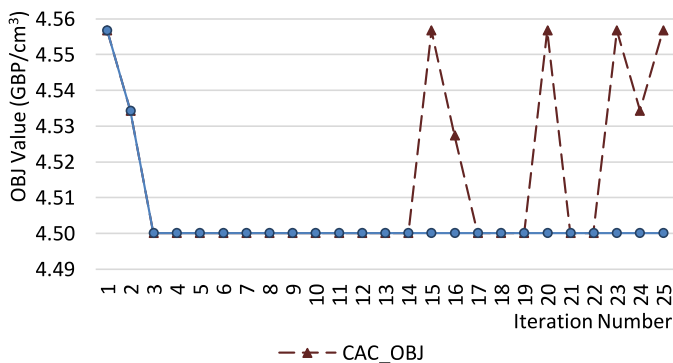


Fig. 5. The convergence of BF procedure.

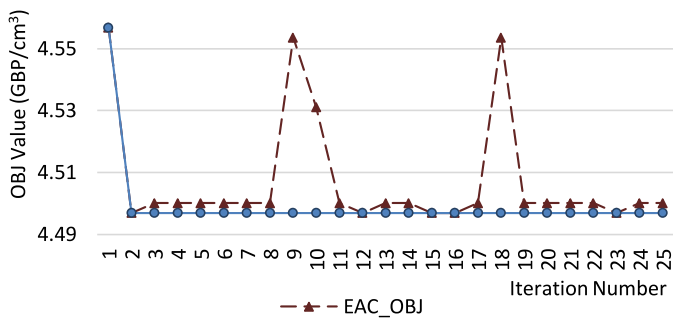


Fig. 6. The convergence of ABF procedure.

5.1. Test data

Table 9 presents the data generated based on some preliminary work and the authors' experience in the AM industry. A master dataset (which can be accessed permanently at the University of

Exeter's ORE-Repository [18]) consisting of large lists of parts and machines was created. To build test problems, the parts and machines were selected from these lists with some rules given in Table 9. In the table, the Range of Parts and Range of Machines columns determine which parts and machines are considered in each test problem (the specific test problems are also available online at the website given above). These ranges are determined systematically to provide a diversified set of test problems in various problem sizes.

5.2. Test results

Table 10 reports computational test results obtained through solving the aforementioned test problems using the CPLEX software and the BF and ABF heuristics. The NJ and OBJ columns report the number of jobs and objective function values (calculated using Eqs. (1) and (2)) belonging to the solution obtained through different approaches for each test problem. For each test problem, an upper limit was determined for the number of jobs for the CPLEX program (see the NJ<sup>U</sup> column in Table 10) based on the solutions obtained from the heuristic algorithms. Thus, this limit did not cause infeasibility but provided some slackness.

CPLEX results were obtained through three different ways under the predetermined upper limit for the number of jobs in order to reduce computation time. First, all problems were attempted to be solved with no CPU time limit, which means the solutions obtained from this approach are optimal. However, the optimum results were only obtained for the first two test problems, #1 and #2, due to the increasing complexity of the problems and out of memory errors for the remaining test problems. This error is caused by the exponentially increasing search space with the increasing problem size.

**Table 9**  
Data for computational tests.

#	Number of parts	Number of machines	Range of parts		Range of machines	
			Begins (including)	Ends (including)	Begins (including)	Ends (including)
1	10	2	1	10	1	2
2	12	2	11	22	2	3
3	14	2	23	36	4	5
4	16	2	37	52	5	6
5	18	2	53	70	7	8
6	20	2	71	90	8	9
7	15	3	91	105	1	3
8	18	3	106	123	2	4
9	21	3	124	144	3	5
10	24	3	145	168	4	6
11	27	3	169	195	5	7
12	30	3	196	225	6	8
13	20	4	226	245	1	4
14	24	4	246	269	2	5
15	28	4	270	297	3	6
16	32	4	298	329	4	7
17	36	4	330	365	5	8
18	40	4	366	405	6	9
19	25	5	406	430	10	14
20	30	5	431	460	11	15
21	35	5	461	495	12	16
22	40	5	496	535	13	17
23	60	5	536	595	14	18
24	80	5	596	675	15	19
25	100	5	676	775	16	20
26	120	5	776	895	17	21
27	140	5	1	140	18	22
28	160	5	141	300	19	23
29	180	5	301	480	20	24
30	200	5	481	680	21	25
31	30	6	681	710	20	25
32	60	6	711	770	21	26
33	90	6	771	860	22	27
34	120	6	861	980	23	28
35	160	6	1	160	24	29
36	200	6	161	360	25	30
37	250	6	361	610	26	31
38	300	6	611	910	27	32
39	360	6	1	360	28	33
40	420	6	361	780	29	34
41	590	6	1	590	30	35
42	660	6	1	660	31	36

The CPU column shows the processor time consumed to get the optimum solution for these two problems. Second, the algorithm was run with a 2000 s CPU time limit for problems #1–#18 and a 4000 s CPU time limit for the remaining problems (see the 2K/4K CPU limit column). Finally, the CPU time limit was increased to 4000 s for test problems #1–#18 and 8000 s for the remaining test problems (see the 4K/8K CPU limit column). Due to the exponentially increasing search space with the increasing number of parts, number of jobs and number of machines, the solutions were only obtained for test problems #1–#26, #28, #31–#36.

Heuristic results were obtained using the BF and ABF procedures explained in Section 3. The maximum number of iterations for both heuristics has been set to 50, 100 and 150 for test problems #1–#9, #10–#22, and #23–#42, respectively. These numbers have been determined after a set of preliminary tests with consideration of the problem complexity, which is affected by the number of machines and the number of parts. The best solutions found for each test problem are presented in Table 10. The IT column gives the number of iterations in which the best solution was found by each heuristic, while the D% column denotes the deviation of the obtained heuristic results from the best CPLEX result (CPLEX 4K/8K CPU Limit) in terms of the OBJ value. For example, D% is calculated for a BF result as follows:  $D\%_{BF} = ((OBJ_{BF} - OBJ_{CPLEX}) / OBJ_{CPLEX}) \cdot 100$ .

To compare our results with what the situation could be without utilization of systematic production planning techniques, we also provided results as if the parts were assigned to the machines based on incremental orders of part numbers. In other words, starting from part 1, parts were assigned to the machines in an incremental order starting from machine 1. When the capacity of the current job on the current machine was not enough to accommodate the next job, a new job was opened on the next machine and assignment process continued from that newly-opened job. Results obtained from that simple rule are provided in the simple ordered schedule column in Table 10.

To give an insight about the enormous amounts of savings that could be made by planning AM/3DP machines using sophisticated scheduling techniques, the total costs of the solutions are also calculated and reported in Table 11. To calculate the total cost of a scheduling solution of a test problem reported in Table 10, the total volume of parts in that test problem is simply multiplied by the OBJ value reported for the same test problem. The difference between the total costs of simple ordered schedule solutions and CPLEX, BF, and BFA solutions are also reported for each test problem.

**Table 10**  
Computational test results.

Test Problem #	CPLEX									Simple ordered		Proposed heuristics									
	NJ <sup>U</sup>	No CPU limit			2 K/4 K CPU limit		4 K/8 K CPU limit		schedule		BF					ABF					
		NJ	OBJ	CPU	NJ	OBJ	NJ	OBJ	NJ	OBJ	IT	NJ	OBJ	CPU	D%	IT	NJ	OBJ	CPU	D%	
1	6	5	<b>4.49693</b>	178.77	5	<b>4.49693</b>	5	<b>4.49693</b>	5	4.5001	14	5	4.50011	28.7	0.07	6	5	<b>4.49693</b>	16.9	0	
2	5	4	<b>4.55895</b>	514.50	4	<b>4.55895</b>	4	<b>4.55895</b>	5	5.1178	15	4	4.56109	27.1	0.05	17	4	<b>4.55895</b>	18.0	0	
3	8	-	-	-	7	<b>7.53692</b>	7	<b>7.53692</b>	6	7.9054	3	7	<b>7.53692</b>	43.1	0.00	7	7	7.54115	22.7	0.06	
4	11	-	-	-	10	<b>7.40305</b>	10	<b>7.40305</b>	8	7.7738	21	10	<b>7.40305</b>	46.3	0.00	20	10	7.40870	27.8	0.08	
5	11	-	-	-	10	<b>7.45879</b>	10	<b>7.45879</b>	7	7.7302	24	10	7.46019	53.2	0.02	5	10	7.46136	34.0	0.03	
6	10	-	-	-	9	<b>7.83539</b>	9	<b>7.83539</b>	7	8.1314	10	9	7.83876	49.4	0.04	27	9	7.84619	26.3	0.14	
7	10	-	-	-	8	4.49170	8	4.49170	8	4.7657	32	9	4.49833	46.1	0.15	11	9	<b>4.49134</b>	25.3	-0.01	
8	7	-	-	-	6	<b>4.58228</b>	6	<b>4.58228</b>	9	5.1330	24	6	4.59050	52.2	0.18	1	6	4.59425	30.8	0.26	
9	10	-	-	-	8	<b>8.03319</b>	8	<b>8.03319</b>	8	8.1235	3	8	8.05533	63.0	0.28	35	9	8.05872	35.1	0.32	
10	12	-	-	-	10	<b>7.33424</b>	10	<b>7.33424</b>	9	7.9065	49	10	<b>7.33424</b>	222.1	0.00	58	11	7.34334	100.5	0.12	
11	14	-	-	-	13	7.41312	13	<b>7.41282</b>	13	7.8033	41	13	7.41756	237.6	0.06	45	13	7.41487	108.5	0.03	
12	20	-	-	-	19	7.13833	18	7.13651	15	7.6280	35	17	<b>7.13536</b>	297.8	-0.02	55	18	7.13857	112.5	0.03	
13	12	-	-	-	11	<b>4.43870</b>	11	<b>4.43870</b>	10	4.8500	9	11	<b>4.43870</b>	223.6	0.00	10	11	4.43884	75.3	0.00	
14	10	-	-	-	9	4.56567	8	<b>4.56037</b>	12	5.7389	17	8	4.56944	252.9	0.20	22	8	4.56407	90.0	0.08	
15	15	-	-	-	14	<b>6.80570</b>	14	<b>6.80570</b>	15	7.3532	65	14	6.81087	305.1	0.08	13	14	6.80984	109.2	0.06	
16	18	-	-	-	17	6.99616	17	<b>6.99391</b>	16	7.7399	10	16	6.99770	356.8	0.05	62	16	6.99562	131.6	0.02	
17	23	-	-	-	22	6.98648	20	<b>6.98077</b>	17	7.7449	14	20	6.99597	400.4	0.22	68	19	6.98448	151.7	0.05	
18	23	-	-	-	22	7.15691	21	<b>7.14684</b>	16	7.5355	38	17	7.15254	386.4	0.08	1	17	7.14994	159.6	0.04	
19	16	-	-	-	15	<b>7.51924</b>	15	<b>7.51924</b>	15	7.9742	17	15	7.52013	311.6	0.01	37	15	7.52028	105.8	0.01	

(continued on next page)

Table 10 (continued)

Test Problem #	CPLEX								Simple ordered		Proposed heuristics									
	NJ <sup>U</sup>	No CPU limit			2 K/4 K CPU limit		4 K/8 K CPU limit		schedule		BF					ABF				
		NJ	Obj	CPU	NJ	Obj	NJ	Obj	NJ	Obj	IT	NJ	Obj	CPU	D%	IT	NJ	Obj	CPU	D%
20	16	-	-	-	15	<b>4.35269</b>	15	<b>4.35269</b>	15	6.6770	26	15	4.35792	320.3	0.12	76	15	4.35716	130.1	0.10
21	20	-	-	-	18	<b>4.50271</b>	18	<b>4.50271</b>	18	4.8180	27	19	4.50599	428.5	0.07	84	19	4.50752	159.8	0.11
22	21	-	-	-	20	<b>4.42343</b>	20	<b>4.42343</b>	19	6.1940	1	20	4.42812	522.8	0.11	57	19	4.43141	205.1	0.18
23	19	-	-	-	18	4.57636	17	<b>4.57057</b>	25	6.3751	65	17	4.57788	1262.8	0.16	66	17	4.57484	466.7	0.09
24	27	-	-	-	26	4.59383	26	4.58640	32	7.0956	43	24	<b>4.58343</b>	1930.9	-0.06	94	25	4.58553	768.3	-0.02
25	49	-	-	-	47	7.90519	47	7.85915	35	7.9661	62	47	<b>7.72662</b>	3080.3	-1.69	20	48	<b>7.72662</b>	1165.7	-1.69
26	33	-	-	-	32	4.60723	32	4.60229	37	7.3485	123	32	4.58813	1288.7	-0.31	115	32	<b>4.58435</b>	1472.6	-0.39
27	42	-	-	-	-	-	-	-	53	7.2721	87	40	<b>4.58319</b>	1695.3	-	14	41	4.58469	1967.8	-
28	49	-	-	-	47	6.45456	47	6.01250	55	7.0075	28	47	<b>4.57280</b>	2415.0	-23.95	103	48	4.57347	2725.5	-23.93
29	57	-	-	-	-	-	-	-	74	6.9179	122	55	<b>4.56859</b>	3285.7	-	88	56	4.56967	3744.5	-
30	60	-	-	-	-	-	-	-	85	6.4002	56	58	<b>4.57059</b>	3461.4	-	86	59	4.57298	4853.0	-
31	10	-	-	-	9	4.57545	9	<b>4.57478</b>	12	6.8456	84	9	4.57792	218.1	0.07	117	9	4.58178	238.2	0.15
32	17	-	-	-	15	4.56568	15	<b>4.56502</b>	23	6.1872	101	15	4.57334	499.6	0.18	3	16	4.57243	585.6	0.16
33	24	-	-	-	22	4.59343	22	4.58629	33	6.8676	11	22	4.58193	946.0	-0.10	101	23	<b>4.57538</b>	1123.3	-0.24
34	35	-	-	-	34	5.26663	34	4.72352	43	7.2085	43	34	4.57596	1626.1	-3.12	40	34	<b>4.57559</b>	1983.4	-3.13
35	47	-	-	-	45	4.60161	45	4.60140	58	6.4628	69	45	<b>4.57762</b>	2649.2	-0.52	8	46	4.57879	3402.8	-0.49
36	63	-	-	-	61	7.54412	61	7.22428	69	6.7314	36	61	4.56889	5981.9	-36.76	77	62	<b>4.56746</b>	8666.6	-36.78
37	74	-	-	-	-	-	-	-	82	6.8312	23	73	<b>4.56444</b>	8556.5	-	52	73	4.56529	10086	-
38	84	-	-	-	-	-	-	-	102	7.2350	1	81	<b>4.57128</b>	23,954	-	7	83	4.57186	28928	-
39	170	-	-	-	-	-	-	-	151	6.8745	61	168	4.44749	22,405	-	75	169	<b>4.44584</b>	23322	-
40	190	-	-	-	-	-	-	-	182	6.2958	1	185	4.45384	27,409	-	14	189	<b>4.45143</b>	28976	-
41	274	-	-	-	-	-	-	-	263	6.1052	73	265	4.45706	80,287	-	43	273	<b>4.45568</b>	95326	-
42	305	-	-	-	-	-	-	-	295	4.8887	59	294	4.45524	124,794	-	8	304	<b>4.45437</b>	138509	-

\* Bold values given in the table indicate the best solutions obtained for related test cases. Obj values are given in GBP/cm<sup>3</sup>.

**Table 11**

The total costs of the solutions obtained.

#	Total volume	CPLEX					Simple ordered schedule	Heuristic procedures				
		No CPU limit		2 K/4 K CPU Limit		4 K/8 K CPU Limit		BF		ABF		
		Total cost	Total cost	Difference	Total cost	Difference		Total cost	Difference	Total cost	Difference	
1	34151.05	<b>£153,574.88</b>	<b>£153,574.88</b>	<b>£108.26</b>	<b>£153,574.88</b>	<b>£108.26</b>	£153,683.14	£153,683.48	-£0.34	<b>£153,574.88</b>	<b>£108.26</b>	
2	51277.84	<b>£233,773.11</b>	<b>£233,773.11</b>	<b>£28,656.62</b>	<b>£233,773.11</b>	<b>£28,656.62</b>	£262,429.73	£233,882.84	£28,546.89	<b>£233,773.11</b>	<b>£28,656.62</b>	
3	37716.64	-	<b>£284,267.30</b>	<b>£13,897.83</b>	<b>£284,267.30</b>	<b>£13,897.83</b>	£298,165.13	<b>£284,267.30</b>	<b>£13,897.83</b>	£284,426.84	£13,738.29	
4	52972.41	-	<b>£392,157.40</b>	<b>£19,639.52</b>	<b>£392,157.40</b>	<b>£19,639.52</b>	£411,796.92	<b>£392,157.40</b>	<b>£19,639.52</b>	£392,456.69	£19,340.23	
5	51753.09	-	<b>£386,015.43</b>	<b>£14,046.31</b>	<b>£386,015.43</b>	<b>£14,046.31</b>	£400,061.74	£386,087.88	£13,973.85	£386,148.44	£13,913.30	
6	97587.83	-	<b>£764,638.71</b>	<b>£28,886.97</b>	<b>£764,638.71</b>	<b>£28,886.97</b>	£793,525.68	£764,967.58	£28,558.10	£765,692.66	£27,833.02	
7	57286.09	-	£257,311.93	£15,696.39	£257,311.93	£15,696.39	£273,008.32	£257,691.74	£15,316.58	<b>£257,291.31</b>	<b>£15,717.01</b>	
8	71312.58	-	<b>£326,774.21</b>	<b>£39,273.26</b>	<b>£326,774.21</b>	<b>£39,273.26</b>	£366,047.47	£327,360.40	£38,687.07	£327,627.82	£38,419.65	
9	57732.10	-	<b>£463,772.93</b>	<b>£5,213.79</b>	<b>£463,772.93</b>	<b>£5,213.79</b>	£468,986.71	£465,051.12	£3,935.60	£465,246.83	£3,739.89	
10	84383.74	-	<b>£618,890.60</b>	<b>£48,289.44</b>	<b>£618,890.60</b>	<b>£48,289.44</b>	£667,180.04	<b>£618,890.60</b>	<b>£48,289.44</b>	£619,658.49	£47,521.55	
11	95146.95	-	£705,335.76	£37,124.44	<b>£705,307.21</b>	<b>£37,152.98</b>	£742,460.19	£705,758.21	£36,701.98	£705,502.27	£36,957.93	
12	119275.10	-	£851,425.02	£58,405.44	£851,207.94	£58,622.52	£909,830.46	<b>£851,070.78</b>	<b>£58,759.69</b>	£851,453.65	£58,376.81	
13	81692.75	-	<b>£362,609.61</b>	<b>£33,600.23</b>	<b>£362,609.61</b>	<b>£33,600.23</b>	£396,209.84	<b>£362,609.61</b>	<b>£33,600.23</b>	£362,621.05	£33,588.79	
14	92724.76	-	£423,350.65	£108,787.47	<b>£422,859.21</b>	<b>£109,278.91</b>	£532,138.13	£423,700.23	£108,437.90	£423,202.30	£108,935.83	
15	98740.47	-	<b>£671,998.02</b>	<b>£54,060.41</b>	<b>£671,998.02</b>	<b>£54,060.41</b>	£726,058.42	£672,508.50	£53,549.92	£672,406.80	£53,651.62	
16	116572.13	-	£815,557.27	£86,699.36	<b>£815,294.99</b>	<b>£86,961.64</b>	£902,256.63	£815,736.79	£86,519.83	£815,494.32	£86,762.30	
17	144202.89	-	£1,007,470.61	£109,366.36	<b>£1,006,647.21</b>	<b>£110,189.75</b>	£1,116,836.96	£1,008,839.09	£107,997.87	£1,007,182.20	£109,654.76	
18	140852.58	-	£1,008,069.24	£53,325.38	<b>£1,006,650.85</b>	<b>£54,743.76</b>	£1,061,394.62	£1,007,453.71	£53,940.90	£1,007,087.50	£54,307.12	
19	164243.07	-	<b>£1,234,983.06</b>	<b>£74,724.03</b>	<b>£1,234,983.06</b>	<b>£74,724.03</b>	£1,309,707.09	£1,235,129.24	£74,577.85	£1,235,153.87	£74,553.21	
20	111738.66	-	<b>£486,363.75</b>	<b>£259,715.28</b>	<b>£486,363.75</b>	<b>£259,715.28</b>	£746,079.03	£486,948.14	£259,130.89	£486,863.22	£259,215.81	

(continued on next page)

Table 11 (continued)

#	Total volume	CPLEX					Simple ordered schedule	Heuristic procedures				
		No CPU limit		2 K/4 K CPU Limit		4 K/8 K CPU Limit		BF		ABF		
		Total cost	Total cost	Difference	Total cost	Difference		Total cost	Difference	Total cost	Difference	
21	149708.41	-	<b>£674,093.55</b>	<b>£47,201.56</b>	<b>£674,093.55</b>	<b>£47,201.56</b>	£721,295.12	£674,584.60	£46,710.52	£674,813.65	£46,481.47	
22	181401.63	-	<b>£802,417.41</b>	<b>£321,184.28</b>	<b>£802,417.41</b>	<b>£321,184.28</b>	£1,123,601.70	£803,268.19	£320,333.51	£803,865.00	£319,736.70	
23	230665.28	-	£1,055,607.36	£414,906.87	<b>£1,054,271.81</b>	<b>£416,242.42</b>	£1,470,514.23	£1,055,957.97	£414,556.25	£1,055,256.75	£415,257.48	
24	264204.19	-	£1,213,709.13	£660,978.12	£1,211,746.10	£662,941.15	£1,874,687.25	<b>£1,210,961.41</b>	<b>£663,725.84</b>	£1,211,516.24	£663,171.01	
25	323539.32	-	£2,557,639.80	£19,706.78	£2,542,744.05	£34,602.53	£2,577,346.58	<b>£2,499,865.38</b>	<b>£77,481.20</b>	<b>£2,499,865.38</b>	<b>£77,481.20</b>	
26	358871.69	-	£1,653,404.42	£983,764.20	£1,651,631.59	£985,537.02	£2,637,168.61	£1,646,549.97	£990,618.65	<b>£1,645,193.43</b>	<b>£991,975.18</b>	
27	497812.86	-	-	-	-	-	£3,620,144.90	<b>£2,281,570.92</b>	<b>£1,338,573.98</b>	£2,282,317.64	£1,337,827.26	
28	590828.26	-	£3,813,536.45	£326,692.58	£3,552,354.91	£587,874.12	£4,140,229.03	<b>£2,701,739.47</b>	<b>£1,438,489.56</b>	£2,702,135.32	£1,438,093.71	
29	741890.72	-	-	-	-	-	£5,132,325.81	<b>£3,389,394.52</b>	<b>£1,742,931.29</b>	£3,390,195.77	£1,742,130.05	
30	768641.54	-	-	-	-	-	£4,919,459.58	<b>£3,513,145.34</b>	<b>£1,406,314.25</b>	£3,514,982.39	£1,404,477.19	
31	109733.88	-	£502,081.88	£249,112.37	<b>£502,008.36</b>	<b>£249,185.89</b>	£751,194.25	£502,352.92	£248,841.32	£502,776.50	£248,417.75	
32	193419.12	-	£883,089.81	£313,632.97	<b>£882,962.15</b>	<b>£313,760.63</b>	£1,196,722.78	£884,571.40	£312,151.38	£884,395.39	£312,327.39	
33	267478.42	-	£1,228,643.40	£608,291.40	£1,226,733.60	£610,201.19	£1,836,934.80	£1,225,567.40	£611,367.40	<b>£1,223,815.41</b>	<b>£613,119.38</b>	
34	422908.39	-	£2,227,302.01	£821,233.12	£1,997,616.24	£1,050,918.89	£3,048,535.13	£1,935,211.88	£1,113,323.25	<b>£1,935,055.40</b>	<b>£1,113,479.73</b>	
35	568003.38	-	£2,613,730.03	£1,057,162.21	£2,613,610.75	£1,057,281.49	£3,670,892.24	<b>£2,600,103.63</b>	<b>£1,070,788.61</b>	£2,600,768.20	£1,070,124.05	
36	749480.96	-	£5,654,174.30	-£609,118.17	£5,414,460.31	-£369,404.18	£5,045,056.13	£3,424,296.06	£1,620,760.07	<b>£3,423,224.31</b>	<b>£1,621,831.83</b>	
37	1051179.10	-	-	-	-	-	£7,180,814.67	<b>£4,798,043.93</b>	<b>£2,382,770.74</b>	£4,798,937.43	£2,381,877.23	
38	978095.92	-	-	-	-	-	£7,076,523.98	<b>£4,471,150.32</b>	<b>£2,605,373.66</b>	£4,471,717.61	£2,604,806.37	
39	1317484.30	-	-	-	-	-	£9,057,046.10	£5,859,498.43	£3,197,547.67	<b>£5,857,324.58</b>	<b>£3,199,721.52</b>	
40	1618653.10	-	-	-	-	-	£10,190,716.12	£7,209,221.88	£2,981,494.25	<b>£7,205,320.92</b>	<b>£2,985,395.20</b>	
41	2317876.70	-	-	-	-	-	£14,151,101.01	£10,330,915.66	£3,820,185.35	<b>£10,327,716.99</b>	<b>£3,823,384.02</b>	
42	2528683.50	-	-	-	-	-	£12,361,974.78	£11,265,891.65	£1,096,083.13	<b>£11,263,691.70</b>	<b>£1,098,283.08</b>	

### 5.3. Discussion

As can be seen from Tables 10 and 11, CPLEX found the optimal solutions for the first two test problems (P1 and P2) in a very short amount of time. However, with an increase in the number of parts, the number of machines and the upper limit for the number of jobs, it could not find optimal solutions beyond this point. When the results in the 2K/4K CPU limit column are compared to the results presented in the 4K/8K CPU limit column, it can be seen that the algorithm returns the same solutions for the first ten test problems (#1–#10). However, with the increase in problem size (starting from #11), CPLEX returns better solutions with better objective function values when the CPU time limit is increased from 2000 s to 4000 s (for #1–#18), and to 8000 s (for #19 and thereafter). Therefore, the capability of CPLEX increases when the CPU time limit is increased (see test problems #11 and thereafter), as better solutions were obtained for a total of 17 test problems.

One could argue that the fewer number of jobs always yields a better objective function value. However, this argument is not true, as there may exist better combinations of parts in different jobs and different machines with different specifications, which increases the area utilization. For example, in test problems #9 and #12, the ABF heuristic finds solutions with *OBJ* values of 8.05872 GBP/cm<sup>3</sup> and 7.13857 GBP/cm<sup>3</sup> with 9 jobs and 18 jobs, respectively. On the other hand, the solutions found for the same test problems by the BF heuristic have *OBJ* values of 8.05533 GBP/cm<sup>3</sup> and 7.13536 GBP/cm<sup>3</sup> with *N<sub>J</sub>* values of 8 and 17 (which are less than CPLEX). A similar situation is also observed for test problem #25. The BF and ABF heuristics find the same *OBJ* values (7.72662 GBP/cm<sup>3</sup>) for this problem with different *N<sub>J</sub>* values, i.e. 47 and 48, respectively.

For a total of 20 test problems among those solved by CPLEX, its solutions with 4K/8K CPU limit were better than those obtained by BF (see #1, #2, #5–#9, #11, #14–#23 and #31–#32); while BF outperforms CPLEX for the majority of the large-sized instances (see #24–#26, #28, #33–#36 and #12). Tie is not broken for four problems; i.e. #3, #4, #10 and #13. ABF also outperforms CPLEX (4K/8K CPU limit) for the same large-sized test problems as BF, in addition to P7. Negative values reported in the *D%* column indicate that the related heuristic method has a better solution than that of CPLEX (4K/8K CPU limit) for the corresponding problem. As seen from the table, the most remarkable difference in favor of the heuristics is observed for #28 and #36 with ~24% and ~37%, respectively, due to the sophistication of the instances dealt with.

Although there are differences in the results obtained by BF and ABF, neither of the heuristics outperformed the other to any great extent. ABF found optimal solutions for #1 and #2, and discovered better solutions than BF for 20 test problems; while BF performed better for the remaining instances, except for #25, where both methods found the same *OBJ* value with different *N<sub>J</sub>* values (as mentioned above).

As CPLEX found optimal solutions for #1 and #2 in both conditions that ran under 2000 s and 4000 s CPU time limits, it is expected that it would also find optimal or at least near-optimal solutions for most of the remaining cases. Therefore, it can be argued that although the optimal solutions are unknown, the solutions found by BF and ABF are optimal or near-optimal for the majority of the remaining test problems.

The performance of the proposed heuristics can also be investigated by comparing the results obtained from BF and ABF with those obtained from the *simple ordered schedule* rule. As can be seen from Tables 10 and 11, *OBJ* values presented in the *simple ordered schedule* column are far beyond the values obtained by any heuristic proposed in this research. This situation reinforces the

need for an intelligent production planning policy for AM/3DP facilities.

### 6. Conclusions and future research

Production planning of additive manufacturing facilities was introduced and modeled mathematically for the first time. Part orders received from distributed customers were considered for production in a group of additive manufacturing machines with different specifications, e.g. unit time cost, processing speed, setup cost, maximum supported area and height. The optimum allocation of parts into such machines was attempted with the aim of minimizing average production cost per volume of material, while satisfying certain constraints. The mathematical model developed for the formulation of the problem studied was also coded in CPLEX to solve the problem optimally. Two simple heuristic procedures were developed and explained step-by-step. A numerical example was also given to explain the characteristics of the problem and its heuristic solutions were presented, as well as the optimal solution. To test the performance of the proposed heuristics and to build a base for future studies, test problems were generated and solved using newly proposed BF and ABF heuristics. The same test problems were also solved using CPLEX under various CPU time limit constraints. The results obtained indicated that both proposed heuristics performed well and provided promising performance values within reasonable computational times, although neither of them outperformed the other one. The computational test results also demonstrated the requirement of developing sophisticated planning and scheduling techniques for AM/3DP resources.

As a new and original work in an emerging research field, this study can be extended in several ways. A possible extension could include consideration of order delivery times, with the aim of satisfying demand by a due date, as well as minimizing production costs. In case orders cannot be separated, direct kitting [6] might be considered in 3DP to enable producing parts belonging to the same order in the same job. Furthermore, as a limitation of the work, one type of raw material is considered in the research, which can be further investigated. A nesting problem could also be integrated into the model to consider the real areas of parts scheduled.

### References

- [1] ASTM. F2792-102 standard terminology for additive manufacturing technologies, 2015, Online. accessed 29.04.15 <http://www.astm.org/Standards/F2792.htm>.
- [2] Coykendall J, Cotteleer M, Holdowsky J, Mahto M. 3D opportunity in aerospace and defense: additive manufacturing takes flight. A Deloitte series on additive manufacturing. Deloitte University Press; 2015. Online [http://d2mtr37y39tpbu.cloudfront.net/wp-content/uploads/2014/05/DUP\\_706-3D-Opportunity-Aerospace-Defense\\_MASTER2.pdf](http://d2mtr37y39tpbu.cloudfront.net/wp-content/uploads/2014/05/DUP_706-3D-Opportunity-Aerospace-Defense_MASTER2.pdf) accessed 20.04.15.
- [3] Huang SH, Liu P, Mokasdar A, Hou L. Additive manufacturing and its societal impact: a literature review. *Int J Adv Manuf Technol* 2012;67:1191–203.
- [4] Koff W, Gustafson P. 3D printing and the future of manufacturing. *Leading Edge Forum*; 2015 [http://assets1.csc.com/innovation/downloads/LEF\\_20123DPrinting.pdf](http://assets1.csc.com/innovation/downloads/LEF_20123DPrinting.pdf) accessed 20.04.15.
- [5] Mellor S, Hao L, Zhang D. Additive manufacturing: a framework for implementation. *Int J Prod Econ* 2014;149:194–201.
- [6] Lyly-Yrjänäinen J, Holmström J, Johansson MI, Suomala P. Effects of combining product-centric control and direct digital manufacturing: the case of preparing customized hose assembly kits. *Comput Ind* 2016;82:82–94.
- [7] Hedenstierna CPT, Disney SM, Holmström J. Order book management in 3D printing service operations: a design science approach. In: *Proceedings of the twenty third annual EurOMA conference, Trondheim, Norway*; 2016.
- [8] AMD. Additive manufacturing for defence and aerospace summit, 2015, Online. accessed 29.04.15 <http://www.additivemanufacturingsummit.com>.
- [9] NASA. Space station 3-d printer builds ratchet wrench to complete first phase of operations, 2015, Online. accessed 21.03.15 [http://www.nasa.gov/mission\\_pages/station/research/news/3Dratchet\\_wrench/](http://www.nasa.gov/mission_pages/station/research/news/3Dratchet_wrench/).
- [10] Rickenbacher L, Spierings A, Wegener K. An integrated cost-model for selective laser melting (SLM). *Rapid Prototyp J* 2013;19:208–14.
- [11] Lin X, Floudas CA, Modi S, Juhasz NM. Continuous-time optimization approach for medium-range production scheduling of a multiproduct batch plant. *Ind Eng Chem Res* 2002;41:3884–906.

- [12] Mishra BV, Mayer E, Raisch J, Kienle A. Short-term scheduling of batch processes. A comparative study of different approaches. *Ind Eng Chem Res* 2005;44:4022–34.
- [13] Méndez CA, Cerdá J, Grossmann IE, Harjunkoski I, Fahl M. State-of-the-art review of optimization methods for short-term scheduling of batch processes. *Comput Chem Eng* 2006;30:913–46.
- [14] SmarTech. Additive manufacturing in aerospace: strategic implications. SmarTech Markets Publishing; 2006. Online; <http://www1.prweb.com/prfiles/2014/08/07/12081177/AerospaceWP.pdf> accessed 25.04.15.
- [15] Cooper DE, Stanford M, Kibble KA, Gibbons GJ. Additive manufacturing for product improvement at red bull technology. *Mater Des* 2012;41:226–30.
- [16] Khajavi SH, Partanen J, Holmström J. Additive manufacturing in the spare parts supply chain. *Comput Ind* 2014;65:50–63.
- [17] Atzeni E, Salmi A. Economics of additive manufacturing for end-usable metal parts. *Int J Adv Manuf Technol* 2012;62:1147–55.
- [18] Qiang Li, Ibrahim Kucukkoc, David Z. Zhang. Production planning in additive manufacturing and 3D printing (Dataset), ORE-Repository, 2015, Online; <http://hdl.handle.net/10871/17360>.